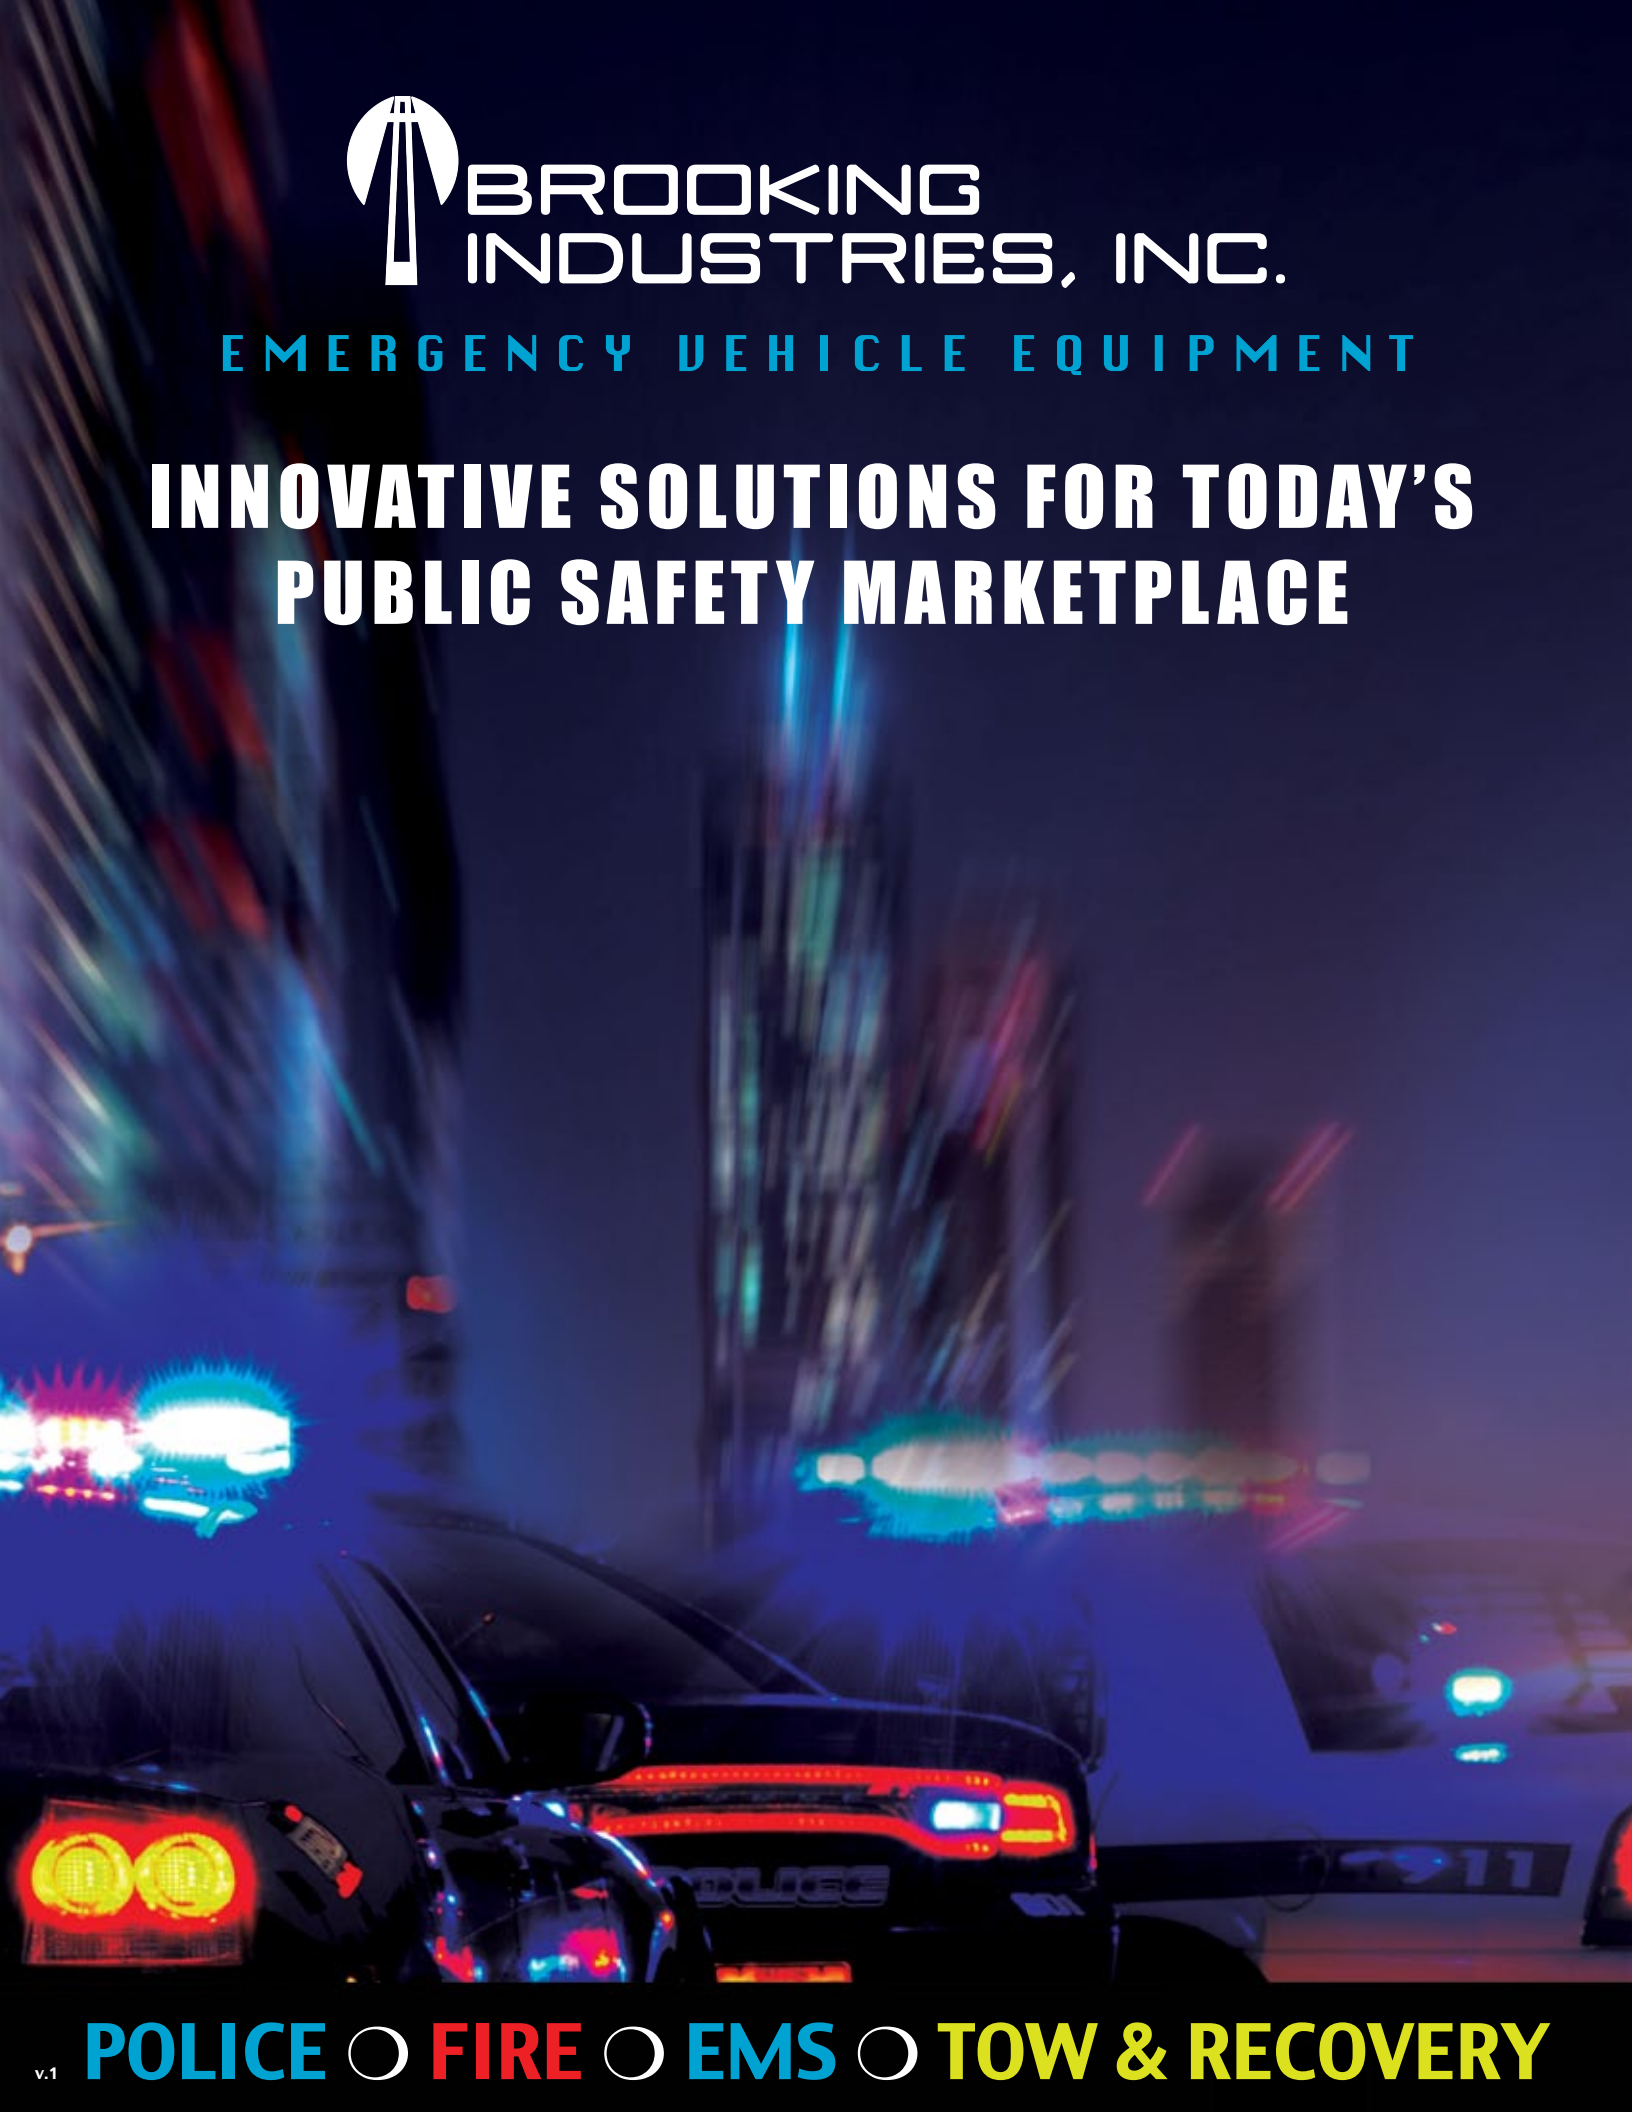
BROOKING
INDUSTRIES, INC.
EMERGENCY VEHICLE EQUIPMENT
INNOVATIVE SOLUTIONS FOR TODAY'S
PUBLIC SAFETY MARKETPLACE
POLICE ○ FIRE ○ EMS ○ TOW & RECOVERY
v.1

ROOFTOP LIGHTBAR

TORRENT LED LIGHTBAR

SPECIFICATIONS
Operating voltage: 12 VDC
Avg. current: 16 Amps @ 12.8 VDC
Max. current: 32 Amps @ 12.8 VDC

DIMENSIONS
Width: 12.4"
Height: 2.6"
Available lengths: 40", 44", 49", 54", 59"

FEATURES
- Xtreme linear optics
- Halogen or LED take downs & alleys
- 3 mode pursuit programmability
- Multiple user selectable warning and arrow patterns, or create your own
- LED colors: Amber, Blue, Red, White
- Lens colors: Amber, Blue, Red, Clear

HARNESS
Power: 15' / 14 AWG x 4 pcs.
Function: 15' / 22 AWG x 16 pcs.

MOUNTING
Steel: Adjustable, Flat Narrow, Flat Wide
Composite: Standard
Vehicle specific strap kits: Brooking strives to supply straps for most vehicles that are common in the lighting arena but does not guarantee to have straps for all vehicles. Please check with a Brooking associate as our offering is constantly changing while new vehicles and year models enter the marketplace.

CERTIFICATIONS
Meets/exceeds SAE & CAXIII requirements

WARRANTY
5 year limited warranty

MORE MODELS AVAILABLE

- "C" Version: Full dual color, run one color or the other. Perfect for those with dual occupations such as snow plow driver and EMS medic.
- "S" Version: Stop / Tail / Turn for the tow and or heavy truck / wide load escort market.
- "H" Version: A hybrid model capable of dual color and single color operation. Perfect for areas where city codes dictate colors on highways and feeder streets.

TORRENT

THE TORRENT IS FLOODING THE MARKET
Already established as one of the more popular options on the market today, the Torrent has taken public safety by storm. Packed full of Xtreme linear LED modules for maximum wide angle output the diode count leaves competitors in the dust. A fully loaded 49" bar complete with dual 9 diode LED take downs and dual 3 diode alleys boasts a total diode count of 156. Compare this with other lightbars and you'll see that the Torrent is in a class by itself.

SLEEK, STRONG AERODYNAMIC DESIGN
Aesthetics are important as are durability and output. The Torrent exceeds market standards in these categories. An extruded aluminum chassis provides rigid support and shock absorption without sagging / bending, while the low profile design reduces wind resistance.

CUSTOMIZE YOUR BAR(S) TO MEET YOUR EXACT SPECIFICATIONS
The Torrent is available in many different lengths and configurations and the programming options allow the user to create unique flash patterns in all 3 modes. Clear lenses are standard and colored lenses are also available. Contact Brooking or download a Torrent build sheet from our website and get started.

ROOFTOP LIGHTBAR

THE TORRENT PIONEERED THE DUAL COLOR LIGHTING TREND AND IS STILL THE ONLY TRUE COLOR CHANGING LIGHTBAR

REAR VIEW WARNING

TRUE DUAL COLOR TORRENT

REAR VIEW TRAFFIC CONTROL

PATENTED COLOR CHANGING TECHNOLOGY - OFTEN IMITATED, NEVER DUPLICATED.
Brooking pioneered the dual color movement using patented technology. This innovative technology tells a single diode which colors to fire whereas other manufacturing methods involve extra diodes at an increased cost to the customer. Change rear inboard heads from warning colors (red or blue) to amber for traffic control and much improved roadside safety.

The full dual color "C" version is capable of running one color or another in situations that require double duty usage. For example, some jurisdictions require one color on the highway and another on feeder streets. Or, it's perfect for the EMS technician whose emergency medical vehicle doubles as a snow plow.

MOUNTS ▼

LMBB
Standard
Composite



TMBF
Flat narrow
surface mount



TMBG
Flat wide
surface mount

DUAL COLOR TORRENT LED LIGHTBAR

SPECIFICATIONS
Operating voltage: 12 VDC
Avg. current: 16 Amps @ 12.8 VDC
Max. current: 32 Amps @ 12.8 VDC

DIMENSIONS
Width: 12.4"
Height: 2.6"
Available lengths: 40", 44", 49", 54", 59"

FEATURES
- Xtreme linear optics
- Halogen or LED take downs & alleys
- 3 mode pursuit programmability
- Multiple user selectable warning and arrow patterns, or create your own
- LED colors: Amber, Blue, Red, White
- Lens colors: Clear

HARNESS
Power: 15' / 14 AWG x 4 pcs.
Function: 15' / 22 AWG x 16 pcs.

MOUNTING
Steel: Flat Narrow, Flat Wide
Composite: Standard
Vehicle specific strap kits: Brooking strives to supply straps for most vehicles that are common in the lighting arena but does not guarantee to have straps for all vehicles. Please check with a Brooking associate as our offering is constantly changing while new vehicles and year models enter the marketplace.

CERTIFICATIONS
Meets/exceeds SAE & CAXIII requirements

WARRANTY
5 year limited warranty

ROOFTOP LIGHTBAR

LEGION

SPECIFICATIONS
Operating voltage: 12 VDC
Avg. current: 16 Amps @ 12.8 VDC
Max. current: 32 Amps @ 12.8 VDC

DIMENSIONS
Width: 13"
Height: 2.3"
Available lengths: 24", 30", 43", 49", 54", 60"

FEATURES
- D-fuser linear optics (corners)
- ReFlector optics (inboard only)
- Halogen or LED take downs & alleys
- 3 mode pursuit programmability
- Multiple user selectable warning and arrow patterns, or create your own
- LED colors: Amber, Blue, Red, White
- Lens colors: Clear

HARNESS
Power: 15' / 14 AWG x 4 pcs.
Function: 15' / 22 AWG x 16 pcs.

MOUNTING
Steel: Flat Narrow, Flat Wide
Composite: Standard
Vehicle specific strap kits: Brooking strives to supply straps for most vehicles that are common in the lighting arena but does not guarantee to have straps for all vehicles. Please check with a Brooking associate as our offering is constantly changing while new vehicles and year models enter the marketplace.

CERTIFICATIONS
Meets/exceeds SAE & CAXIII requirements

WARRANTY
5 year limited warranty

MORE MODELS AVAILABLE

- "C" Version: Full dual color, run one color or the other. Perfect for those with dual occupations such as snow plow driver and EMS medic.
- "S" Version: Stop / Tail / Turn for the tow and or heavy truck / wide load escort market.
- "H" Version: A hybrid model capable of dual color and single color operation. Perfect for areas where city codes dictate colors on highways and feeder streets.

LEGION

THE LEGION IS AN AFFORDABLE OPTION WHEN BUDGETS ARE TIGHT

A high performance, competitively priced option when operating with a tight budget. Inboard heads feature ReFlector optics for maximum effect and corner heads are 6 diode D-Fuser linear style heads which provide superior off axis output resulting in full 360 degree coverage.

SECTIONED POLYCARBONATE TOP SHELL PROVIDES FOR EASY MAINTENANCE

Top panels remove easily and allow full access to the interior of the lightbar making field service easier and faster than ever. These polycarbonate panels are UV stabilized, no cracking or discoloring even in the toughest conditions. A black polycarbonate base on a rigid aluminum platform ensures years of trouble free service.

MOUNTS ▼

LMBB
Standard
Composite



TMBF
Flat narrow
surface mount



TMBG
Flat wide
surface mount

INTERIOR LIGHTING

SV4 / SV6 INTERIOR LIGHTBAR ▼

SLICKTOP / COVERT LIGHTING AT ITS FINEST

Xtreme linear optics provide the punch of strobe while retaining the resilience and performance of LED technology. Choose from the SV4 (40 diodes) or the SV6 (56 or 60 diodes). Each unit comes standard with a shroud extender kit for those hard to fill spaces that come with some windshields. Take downs are TLED04 heads (not linear).

VEHICLE SPECIFIC MOUNTING BRACKETS REDUCE INSTALLATION TIME

Each unit comes standard with a universal mounting kit. Or purchase our vehicle specific brackets that reduce install time providing the most secure fit without hampering officer visibility.

Brooking manufactures interior visor brackets for a variety of vehicles including those that are most popular in the Law Enforcement industry. Our offering expands as more vehicles enter the marketplace. Please check with an associate or consult our most recent price guide for updated information.

DASH LIGHTS ▼

The compact Titan with its one piece design is perfect for quick transfers and is easy to stow away when not in use. Adjustable diode panel allows the Titan to conform to the rake of most windshields. The versatile MicroMax and its alternate mounts provide maximum windshield and / or deck lighting, just flip the windshield bracket and remove the suction cups for the perfect deck light.

TITAN SERIES

TDSE4 ▲
SPECIFICATIONS
Voltage: 11-30VDC
Current: Max. 0.56 Amps
Flash Patterns: 19



TDXL6 ▲
SPECIFICATIONS
Voltage: 11-30VDC
Current: Max. 0.92 Amps
Flash Patterns: 19

MICROMAX SERIES

MMAX204P ▲
SPECIFICATIONS
Voltage: 12VDC
Current: Max. 1.40 Amps
Flash Patterns: 26

MMAX206P ▲
SPECIFICATIONS
Voltage: 12VDC
Current: Max. 1.60 Amps
Flash Patterns: 26

CUTTING OFF 12V PLUG FOR DECK USE / HARWIRE INSTALLATION WILL NOT VOID WARRANTY.

SV4 / SV6 INTERIOR LIGHTBAR▼

SPECIFICATIONS
Voltage: 12 VDC
Current: Max. 4.8 Amps (SV4)
Max. 6.5 Amps (SV6)

DIMENSIONS
Total length: 46.8"
Height: 1.38"

FEATURES
- Xtreme linear optics
- 25 user selectable flash patterns
- Optional LED take downs
- Flashback reducing shroud extender kit
- Universal mount bracket kit standard
- LED Colors: Amber, Red, Blue, White

CERTIFICATIONS
Meets/exceeds SAE & CAXIII requirements

WARRANTY
5 year limited warranty

ALTERNATIVE MOUNTING OPTIONS AVAILABLE FOR 204P & 206P WINDOW & DECK APPLICATIONS

MBMMAXA-2
Suction Cup Bracket

MBMMAXB
L-Bracket

MBMMAX2H
Headliner Bracket

SURFACE MOUNT LIGHTING

ST6

SPECIFICATIONS
Voltage: 12~24 VDC
Avg currect: 0.5A
Max current: 1A
DIMENSIONS
Length: 4.4″ Width: 0.35″ Height:1.1

ID6

SPECIFICATIONS
Voltage: 12~24 VDC
Avg current: 0.5A
Max current: 1 Amp
DIMENSIONS
Length: 5.09″ Width: 0.66″ Height: 1.24″

ID26

SPECIFICATIONS
Voltage: 12~24 VDC
Avg current: 0.85
Max current: 2 Amps
DIMENSIONS
Length: 5.19″ Width: 0.6″ Height: 1.98″

MS26BS

SPECIFICATIONS
Voltage: 12~24 VDC
Avg current: 0.75A
Max current: 2.5A
DIMENSIONS
Length: 5.19″ Width: 0.66″ Height: 1.92″

MS3BS

SPECIFICATIONS
Operating voltage: 11~30 VDC
Avg current: 0.35A
Max. current: 0.92A @ 12.8 VDC
Length: 5.2″ Width:1.2″ Height: 0.6″

MS6BS

SPECIFICATIONS
Operating voltage: 11~30 VDC
Avg current: 0.45A
Max. current: 0.8A @ 12.8 VDC
Length: 3.4″ Width: 1.2″ Height: 0.6″

ST6 ▼
6 High Intensity 1W LEDs

The Super Thin (ST) is the thinnest and most discreet light head to ever hit the market, a true game changer! Heat dissipation achieved through composite material base acting as heat sink.

ID6 ▼
6 High Intensity 1W LEDs

The ID6 features 180 degrees of coverage with the offset diodes on the sides providing super effective off axis coverage, perfect for intersection lighting. Program mode allows cruise / steady low power that converts to warning flashing.

ID26 ▼
12 High Intensity 1W LEDs

A stacked verision of the ID26 provides that coveted off axis output without sacrificing head on ouput. Program mode allows for cruise / steady that converts to warning.

MS26BS ▼
12 High Intensity 1W LEDs

A stacked verision of the MS6 for those who don't believe in "too much"!

MS3BS ▼
3 High Intensity 1W LEDs

One of our all time best sellers, the MS3's tiny size makes it one of the more popular choices especially for the license plate area.

MS6BS ▼
6 High Intensity 1W LEDs

Our all time best seller has set the bar for surface mount lighting. Perfect for our Ford Interceptor fender inserts, Shadow™ pod for Tahoe, grill mount and under tailgate mounting.

USE MS3'S OR MS6'S IN OUR SHADOW™ FOR CHEVY TAHOE'S! 2015 MODEL COMING SOON!

SURFACE MOUNT LIGHTING

TLED04 ▼
4 High Intensity 1W LEDs

SPECIFICATIONS
Voltage: 12~24 VDC
Max current: 0.70 Amps
DIMENSIONS
Length: 4.8″ Width: 1.1″ Height: 1.6″

XL6B ▼
6 High Intensity 1W LEDs

SPECIFICATIONS
Voltage: 12~24 VDC
Max current: 0.92 Amps
DIMENSIONS
Length: 6″ Width: 1.8″ Height: 0.9″

XLED18B ▼
18 High Intensity 1W LEDs

SPECIFICATIONS
Voltage: 12~24 VDC
Max current: 0.92 Amps
DIMENSIONS
Length: 6″ Width: 1.8″ Height: 0.9″

XL09B ▼
9 High Intensity 1W LEDs

SPECIFICATIONS
Voltage: 12 VDC
Max current: 2.34 Amps
DIMENSIONS
Length: 6.3″ Width: 3.6″ Height: 1.18″

SURFACE MOUNT BRACKETS ▼

L Bracket

L Bracket (Stacked)

L Bracket (left/right)



Swivel Bracket

EACH LIGHT HEAD HAS ITS OWN UNIQUE CODE FOR EACH OF THE BRACKETS PICTURED.
PLEASE CONSULT OUR MOST RECENT PRICE GUIDE FOR THE MOST UP TO DATE INFO.

Trunk Mount

License Plate Bracket

Headliner Bracket

Height & Angle Adjustable XL09 & XLED18

SURFACE MOUNT FEATURES

- Multiple user selectable flash patterns
- Reverse polarity protection
- Weatherproof and vibration resistant
- Multi - unit synchronization
- LED colors:
  - **ST6:** Amber, Blue, Red, White A/W, R/B, B/W, R/W
  - **ID6:** Amber, Blue, Red, White A/W, R/B, B/W, R/W
  - **ID26:** Amber, Blue, Red, White A/W, R/B, B/W, R/W
  - **ID26:** Amber, Blue, Red, White A/W, R/B, B/W, R/W
  - **MS3BS:** Amber, Blue, Red, White
  - **MS6BS:** Amber, Blue, Green, Red, White A/W, R/B, B/W, R/W
  - **TLED04:** Amber, Blue, Red, White A/W, R/B, B/W, R/W
  - **XL6B:** Amber, Blue, Red, White A/W, R/B, B/W, R/W
  - **XL09B:** Amber, Blue, Red, White
  - **XLED18B:** Amber, Blue, Red, White A/W, R/B, B/W, R/W
- Housing / Base:
  MS3BS, MS6BS, MS26BS, ID6, ID26
  XLED18B & XL09B are a fixed design, no flange / bezel removal.
  TLED04B & XL6B come standard with black flange / bezel. Chrome plated single and double stack bezels available as upgrade.
  ST6 has chrome and white flange / bezel available as an upgrade.

CERTIFICATIONS
Meets/exceeds SAE requirements

WARRANTY
5 year limited warranty

FENDER INSERTS (FI-FiS)

New fender inserts for the Ford Interceptor sedan accommodate **MS3BS, MS6BS, ST6 & ID6.**
PICTURED WITH ID6

MULTI-MOUNT LIGHT HEADS

MS3BH / MS6BH

SPECIFICATIONS
Voltage: 11~30 VDC

DIMENSIONS

MS3BH
Length: 2.5" Width: 1.5" Height: 0.94"

MS6BH
Length: 4.2" Width: 1.5" Height: 0.94"

FEATURES
- Flash patterns: MS3 (12) MS6 (20)
- Reverse polarity protection
- Weatherproof and vibration resistant
- Up / down angle adjustable
- Multi - unit synchronization
- Solid Colors: Amber, Blue, Red, White
- MS6 Split Colors: A/W, R/B, R/W, B/W

CERTIFICATIONS
Meets/exceeds SAE and CAXIII requirements

WARRANTY
5 year limited warranty

CERTIFICATIONS
Meets/exceeds SAE and CAXIII requirements

SQ4

SPECIFICATIONS
Voltage: 12~24 VDC

DIMENSIONS
Length: 3.3" Width: 1.1" Height: 3.5"

FEATURES
- Multi - unit synchronization
- 20 user selectable flash patterns
- Reverse polarity protection
- Weatherproof and vibration resistant
- Colors: Amber, Blue, Red, White

CERTIFICATIONS
Meets/exceeds SAE & CAXIII requirements

WARRANTY
5 year limited warranty

PAR36X10

SPECIFICATIONS
Voltage: 12 VDC
Max current: 0.75 Amps

FEATURES
- Xtreme linear optics
- 12 User selectable flash patterns
- Multi – unit synchronization
- Reverse polarity protection
- Weatherproof and vibration resistant
- Multiple mounting options
- Colors: Amber, Blue, Red, White
- Black flange standard, chrome available as upgrade

CERTIFICATIONS
Meets/exceeds SAE requirements

WARRANTY
5 year limited warranty

The "H" version multi - mount models of the MS3 and MS6 give the user 3 different options for mounting: (1) Unique "lip mount" system for a compression type, no holes drilled mount on any surface with an exposed edge, (2) permanent mount, or (3) super tacky adhesive pads.

MS6BH ▼
6 High Intensity 1W LEDs

MS3BH ▼
3 High Intensity 1W LEDs

SQ4 ▼
4 High Intensity 1W LEDs

The SQ4 is the definition of versatile. Each unit comes standard with a single bolt "U" bracket that allows swivel and rotation for the perfect angle every time. Use either the "L" bracket or the fixed "U" bracket for applications where single bolt hole size / drilling is not acceptable or possible.

MBGSSQ4

MBU2SQ4

PAR36X10 ▼
10 High Intensity 1W LEDs

DC-PARM11 ▼ CHARGER SPECIFIC



Chevrolet Tahoe specific PAR36 mount also available!
CT-PARM09 (2009 - 14)
2015 MODEL COMING SOON!

PAR36X10 MOUNTS ▼

MBPAR36GR
Grommet Mount (Rubber)

MBPAR36SA
Adjustable L bracket

MBPAR36SB
L-Bracket

LIGHT STICKS (WARNING & T/A)

COMMANDER ▼

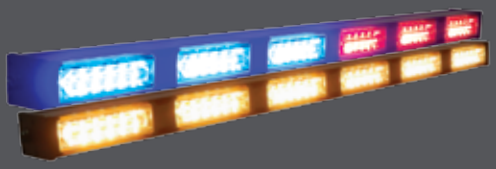

AVAILABLE IN DCLTA MODEL (DUAL COLOR / COLOR CHANGING)

WARNING PATTERNS ONLY

Model	Heads	Max.Current	Length
CLWW2XL6	2	1.68 Amps	11.14"
CLWW4XL6	4	3.36 Amps	22.83"

WARNING & TRAFFIC PATTERNS

Model	Heads	Max.Current	Length
CLTA6XL6	6	5.04 Amps	34.53"
CLTA8XL6	8	6.72 Amps	46.18"

COMMANDER / RayZR MOUNTS ▼



Height & Angle Adjustable "L"



L Bracket

EACH BRACKET HAS ITS OWN UNIQUE CODE, CONSULT OUR MOST RECENT PRICE GUIDE FOR THE MOST UP TO DATE INFO.



Flush Mount

Mini L

COMMANDER / RayZR CONTROLLER

LED indicator panel mimics warning or arrow pattern for peace of mind. This controller is designed to work with the Commander only and is not compatible with other manfacturer's products.

SW610-TA ▲

RayZR ▼

WARNING PATTERNS ONLY

Model	Heads	Max.Current	Length
E10-4020	4	1.68 Amps	18"
E10-6020	6	3.36 Amps	27"

WARNING & TRAFFIC PATTERNS

Model	Heads	Max.Current	Length
E10-8020	8	5.04 Amps	35.3"
E10-0020	10	6.72 Amps	48.5"

The new RayZR micro-stick is just that, razor thin and surprisingly lightweight. For applications where the Commander is to bulky or heavy this new offering provides the solution. The unique optics in each 3 diode module pack the punch of the Xtreme linear modules while their smaller size allows for higher head count in the same size extrusion providing more flashing action, keeping oncoming traffic. aware and alert.

FLASHBACK SHROUD ▶

Brooking's solution to flashback is a contoured shroud of black polycarbonate extending over the Commander / RayZR and out to the rear glass significantly reducing flashback. Pictured at night with CLTA6XL6 in the rear deck of a 2013 Dodge Charger. Most output is trapped below the shroud!

AVAILABLE MODELS: DODGE CHARGER, FORD INTERCEPTOR SEDAN

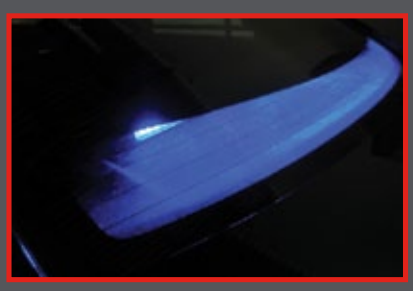

COMMANDER

SPECIFICATIONS
Voltage: 12 VDC

DIMENSIONS
Depth: 2.25"
Height: 1.8"
Length: Listed in charts

FEATURES
- Flash patterns
  - **CLWW:** 26 warning
  - **CLTA:** 11 warning, 11 traffic
- Reverse polarity protection
- Weatherproof and vibration resistant
- Quick connect heads and processor for easy maintenance.
- Multi - unit synchronization
- Xtreme linear optics
- LED colors: Amber, Blue, Green, Red, White

HARNESS
CLWW: 24" / 14 AWG x 4 pcs.
CLTA: 15' / 14 AWG x 6 pcs.

MOUNTING
See brackets

CERTIFICATIONS
Meets/exceeds SAE & CAXIII requirements

WARRANTY
5 year limited warranty

RayZR

SPECIFICATIONS
Voltage: 12 ~ 24 VDC

DIMENSIONS
Depth: 1.5"
Height: 0.95"
Length: Listed in charts

FEATURES
- Flash patterns
  - **4020:** 20 warning
  - **Others:** 20 warning, 11 traffic
- Reverse polarity protection
- Weatherproof and vibration resistant
- Quick connect heads and processor for easy maintenance.
- Multi - unit synchronization
- LED colors: Amber, Blue, Red, White

HARNESS
4020: 36" / 14 AWG x 4 pcs.
OTHERS: 15' / 14 AWG x 8 pcs.

MOUNTING
See brackets

CERTIFICATIONS
Meets/exceeds SAE & CAXIII requirements

WARRANTY
5 year limited warranty

HEADLIGHT / TAIL-LIGHT ACCESSORIES

LED HIDEAWAY

FEATURES (ALL MODELS)

- 20 user selectable flash patterns
- Simultaneous or alternating flashing
- Multi - unit synchronization
- Reverse polarity protection
- Weatherproof and vibration resistant
- 3 pin connectors for easy upgrade from strobe
- LED Colors: Amber, Blue, Red, White
- 5 year limited warranty

Kit Components:
(2) light heads
(1) 6‴ jumper cable
(1) Flasher module and 10' cable

HAL09A LED SYSTEM

SPECIFICATIONS
Voltage: 12~24VDC
Current: Max. 2.4 Amps
Flash Patterns: 20

HAL06A / PAL06A LED SYSTEM

SPECIFICATIONS
Voltage: 12VDC
Current: Max. 1.8 Amps
Flash Patterns: 20
Flange Colors: Black, White, Chrome

TAL06 LED SYSTEM

SPECIFICATIONS
Voltage: 12VDC
Current: Max. 1.8 Amps
Flash Patterns: 20

FLASHERS

FL-40FIF: Ford Interceptor Headlights
FL-20RFIF-S: Ford Interceptor Sedan Tail Lights
FL-20RFIF-U: Ford Interceptor Utility Tail Lights
FL-80RFIP: Dodge Charger Rear Panel
FL-60: Universal (Not Plug & Play)
FL-CTF: Chevrolet Tahoe
FL-UF1: Universal (not plug & play)

FL-LB

L SHAPED MOUNTING BRACKET
FOR 20, 40, 60 & 80

HAL09A▼

9 High Intensity 1W LEDs

Get 360 degree output with the innovative HAL09A series LED hideaways. 9 diodes are laid out in groups of 3 in the shape of a pyramid resulting in the most effective hideaway available today.

HAL06A▼

6 High Intensity 1W LEDs

6 Diodes positioned on a 45 degree angle make this an effective hideaway LED as well as surface mount. Rotating the light head aims the diodes in any desired direction.
ALSO AVAILABLE IN SPLIT COLOR MODEL (S-HAL06)
R/B, B/W, R/W, A/W, A/R, A/B

PAL06A▼

6 High Intensity 1W LEDs

Rubber grommet pop-in design makes replacing vehicles with dated strobe equipment a breeze! 6 high intensity diodes positioned flat result in an extremely effective hideaway or surface mount.
ALSO AVAILABLE IN SPLIT COLOR MODEL (S-PAL06)
R/B, B/W, R/W, A/W, A/R, A/B

TAL06A▼ TWIST LOCK DESIGN!

6 High Intensity 1W LEDs with Optical Lens

Twist lock design fits Ford Interceptor sedan and utility vehicles while the optical lens creates unrivaled output.
ALSO AVAILABLE IN SPLIT COLOR MODEL (S-TAL06)
R/B, B/W, R/W, A/W, A/R, A/B

THESE ARE MORE THAN JUST FLASHERS, THEY INTERFACE WITH THE VEHICLE MAKING THEM INVISIBLE TO THE BODY CONTROL MODULES AND CAN BUS SYSTEM.

There is nothing more effective during daylight hours than flashing halogen bulbs, enter Brooking's new line of flasher / interfaces that not only flash factory head lights and tail lights but also act as a hub for all accessory lighting with a constant "hot" auxiliary output making installation and maintenance easier than ever before. Our FL-40 freezes the shutter in the high beam mode providing high beam output when flashing. Manual activation of the high beams over-rides the flasher for safe night-time pursuit. All models listed to the left, they're all plug & play with the exception of the UFI & 60!
Many have accomplished the flashing of the rear brake panel of the Dodge Charger's but at what cost? If you're not using Brooking's patented technology the likelihood of damaging the CAN Bus system or BCM's is extremely high if not inevitable. Erase all doubt and feel comfortable with your work using Brooking's patent pending FL series modules.

WORK LIGHTS / SCENE LIGHTS

WLH1B031-00▼
(4) 1W LED's (400 lm)

WLG-1B051-00▼
(4) 1W LED's (900 lm)

WLC506FB-D7▼
6 High Intensity 1W LED's

WLB506FBD7▼
6 High Intensity 1W LED's

WLD-6B074-00▼
4 High Intensity 1W LEDs

WLE-6B076-00▼
6 High Intensity 1W LEDs

WLD AND WLE FEATURE WEATHER-PROOF CONNECTORS!

LED WORK LAMPS

FEATURES (ALL)

- Heavy duty powder-coated die cast aluminum
- Beam shape: Flood
- Low power consumption
- Reverse polarity protection
- Weatherproof and vibration resistant
- Weatherproof connectors (WLD & WLE)
- 5 year limited warranty

WLC / WLB

SPECIFICATIONS
Voltage: 11~70 VDC
Current: 12.8V Max. Current: 2A
25.6V Max. Current: 0.9A
Max. Wattage: 30W
Lumens: 1900 lm

WLD -6B074-00

SPECIFICATIONS
Voltage: 11~70 VDC
Current: 12.8V Max Current: 2.4A
25.6V Max Current: 1.2A
60V Max Current: 0.5A
Max. Wattage: 32W
Lumens: 3200 lm

WLE-6B076-00

SPECIFICATIONS
Voltage: 11~70 VDC
Current: 12.8V Max Current: 3.6A
25.6V Max Current: 1.8A
60V Max Current: 0.8A
Max. Wattage: 48W
Lumens: 4800 lm

LED SCENE LIGHT ▼

Use the 30 degree angled mounting box to the side of a vehicle for soft yet effective scene lighting, perfect for accident scenes where lights that are too bright can affect the performance of life saving personnel.
If overhead or compartment lighting is needed just mount the BXLED10B to the ceiling and enjoy cool, heat free luminescence with virtually no amp draw.

BXLED10B-M▼
10 High Intensity 1W LEDs

BXLED10B▼

LED SCENE LIGHT

SPECIFICATIONS/FEATURES

- Voltage: 10~30 VDC
- Average current: 1.2 Amps @ 12.8 VDC
  0.6 Amps @ 25.6 VDC
- Angled mounting bracket (optional)
- Low power consumption
- Reverse polarity protection
- Weatherproof and vibration resistant
- 5 year limited warranty

DIMENSIONS (WITH ANGLED BRACKET)

Length: 6.3"
Width: 2.2"

LIGHTING CONTROL / CONSOLES

SWITCH BOXES

DIMENSIONS
6.25"L x 5"W x 2.25"H

WARRANTY
3 year limited warranty

FEATURES: (all models)
- Black powder-coated steel case
- LED backlighting
- Lighted switches
- 60 title adhesive legend sheet
- SAE automotive grade wiring
- 12" loomed wiring harness
- Colored & numbered wires
- Bail bracket & mounting hardware
- Covered blade fuses

SWITCH / OUTLET PLATES

ONLY A FEW OF OUR PLATES ARE PICTURED

SP-9SWC30 (Pictured)
- (3) 40A capable progressive slide positions w/ auto-resetting circuit breaker & in-line 40A relay. (6) 15A switches fused @ 20A
- 6 backlit Carling style switches (25A ea)
- 3 switched 12V outlets with rubber covers

SP-4SWCSMUSB (Pictured)
- (3) 40A capable progressive slide positions w/ auto resetting circuit breaker & in-line 40A relay
- **(4) backlit Carling style switches**
- **(1) push button momentary**
- **(2) USB ports**

SP-5302USB (Pictured)
- (3) constant hot 12v outlets
- (2) usb ports

SP-6SW (pictured)
- (6) 15A lighted switches fused @ 20A

DIMENSIONS
All plates are 8.56" wide, height varies per model

WARRANTY
3 year limited warranty

CONSOLES

BC-LBS ▲

SWITCH BOXES ▼

BR-950: (5) 15A switches fused @ 20A
BR-960: (1) 40A capable switch & (5) 15A switches fused @ 20A
BR-959J: (6) 15A switches fused @ 20A, sixth switch is a 3 position jogger
BR-970S: (3) 40A capable progressive slide positions w/ auto-resetting circuit breaker & in-line 40A relay. (6) 15A switches fused @ 20A, sixth switch is a 3 position (on/off/momentary).

BR-950 ▼

BR-960 ▼

BR-970S ▼

PLATES ▼

This unique design makes installation and diagnosis much easier than standard "box" style switching apparatus. These powder-coated steel plates also fit most major manufacturers' consoles & feature LED backlighting and lighted switches. All models have 12" harnesses, 60 title adhesive legend sheets and extra blank legend tiles. No assembly required.

SP-4SWCSMUSB ▲



SP-6SW ▲

FOR A COMPLETE LIST OF ALL MODELS PLEASE VISIT OUR WEBSITE OR CONSULT YOUR MOST RECENT BROOKING INDUSTRIES PRICE GUIDE.

SP-9SWC30 ▲

SP-5302USB ▲

CONSOLES ▼

Choose from our Dodge Charger specific model (pictured right) or the long body console (pictured left). The LBS is designed for larger vehicles (Tahoe, Explorer, F250, etc.) and can be used with either the factory base plate or our slotted base plate using vehicle specific mounting feet. The unique design of the main box allows for multiple positions and the recess in the rear drivers side provides that much needed 2" space for weapon / holster.
The BC-DC2 is designed specifically for the Dodge Charger and comes with dual cup holders, plate for factory 12V outlets & USB port, arm rest and a 3 piece spacer kit. Laptop stand compatible. Designed for use with shallow / remote control heads.

BC-DC2 ▲

LIGHTING CONTROL

DIGITAL SWITCH PANELS ▼

BR-990: 6 durable silicone membrane push buttons. Four buttons can be set to momentary while one button can be set as an 8 second timed momentary.

BR-993: 3 pursuit buttons can be configured to operate any combination of the lower 6 buttons automatically - eliminating hours of tedious wiring. Two hidden membranes located behind the logo (back light dimming and timer / delay).

FEATURES

- Digital switching provides quick action & efficient lower operating current plus increased reliability.
- Slim design with self-performing diagnostics at power-up ensures optimum performance.
- LED back lighting on the buttons and titles for easy function identification in the dark.
- 60 title adhesive legend sheet and 2 piece swivel style bracket with mounting hardware included.
- Console mounting plates available (CP-990 & CP-993).
- Relay kit or table available for higher amperage capability.

FULL FUNTION SIREN CONTROLLERS ▼

SC-409

Designed to power one or two 100-watt speakers, the **SC-409** Commander includes a 6 position rotary switch including the new Cycler setting which allows the operator to select the Horn Ring Cycler 2 (HRC2) mode from the rotary switch. There are also two override membrane push button switches for Manual and Air Horn control. A pursuit ready lever/slide switch up to 60 amps of primary light control has the flexibility to be progressive, non-progressive, or partially progressive, tie auxiliary switches to programmed positions on the lever/slide switch and automatically run the siren tones. The siren is LED backlit and the auxiliary switches turn red when activated. The noise canceling microphone has P.A. override in all positions except Radio with a face mounted volume control knob. The Siren Cutout connects to the door switch and automatically disables the siren when the driver's door opens. The siren is installed using detachable connectors with screw-down terminals for all connections except the lever/slide switch, which utilizes heavy-duty screw-down terminals. Each output is individually fused and all fuses are externally accessible. As with all Carson Sirens products, the Commander siren is backed by a no-hassle 5-year limited warranty.

SAF-206S

200W unit with full lighting control comes with a noise-canceling microphone for PA use and push-button override. A 4-position slide switch for primary lighting system control and 6 independently controlled switches, all 10A. Six primary operation modes: PHASER, YELP, WAIL, STBY, HF, and RADIO with a HORN button and a MAN button override. The Phaser tone can be replaced by HiLo tone or disabled entirely. A horn ring transfer input is available for the connection to vehicle horn ring or remote switch for hands-free siren operation. Park kill input is available for connection to a door switch, etc. to stop siren tones when exiting the vehicle. A video trigger output is available for activation via lever switch or auxiliary switches.

SAF-205H

200W unit with full lighting control. Remote hand held controller with a noise canceling microphone for PA use and push-button over-ride in all modes, illuminated buttons change color to indicate status and a potentiometer controls PA volume. Control options are three push buttons for primary lighting system control and four auxiliary (10A) output push buttons while Radio and siren volume can be adjusted on the side of the siren amplifier. A horn ring transfer input is available for the connection to vehicle horn ring or remote switch for hands free operation. A park kill input is available for connection to a door switch, etc. to stop siren tones when exiting the vehicle.

LS-100 SPEAKER

100W, 11 Ohm cast speaker with bail "U" bracket. Rugged, reliable and LOUD!

SPECIFICATIONS

Weight: 6 lbs. | Rated Power: 100M | Rated Impedence: 8 Ohm / 11 Ohm
Sound Frequency Range: 200-500Hz

DIMENSIONS

Length: 7.3" Width: 2.95" Height:6.18"

DIGITAL SWITCH PANELS

SPECIFICATIONS

BR-990: 6.5"L x 1.25"W x 2.5"H
BR-993: 6.5"L x 2"W x 2.5"H

Current draw: BR-990: 60 Amps (10 per switch)
BR-993: 12 Amps (2 per switch)

MOUNTING OPTIONS

2 piece swivel bracket standard or console plate upgrade (CP-990 & CP-993)

WARRANTY

3 year limited warranty

SC-409 ▼

WE OFFER THE ENTIRE CARSON SIREN PRODUCT LINE, PLEASE CONSULT YOUR PRICE GUIDE FOR A FULL LISTING.

SAF-206S ▼

SAF-205H ▼

LS-100 ▼

PRISONER TRANSPORT

STEEL WINDOW BARS

FEATURES
- Horizontal bar design improves visibility
- 11 gauge hot rolled steel provides superior strength and resistance.
- Easy install

WARRANTY
2 year limited warranty

ABS DOOR PANEL COVERS

FEATURES
- 1/8" Virgin ABS plastic (UV stabilized)
- Easy install
- Door "skins" do not require removal of factory door panels reducing install time and piles of factory door panels to store.
- Black ABS hides scuffs and scratches

WARRANTY
2 year limited warranty

ABS TRANSPORT SEATS

FEATURES
- 1/4" Virgin ABS plastic (UV stabilized)
- Black ABS hides scuffs and scratches
- CNC computer cutting create the perfect fit every time, no gaps or trimming!
- Innovative design provides more leg room and overall space making it easier to place and remove the detainee
- Easy installation using factory seat belts or seat belt extenders (PT-SBE)
- Pre-drilled mounting holes prevent expensive mistakes like drilling into factory wiring harnesses or gas tanks!
- Free freight (Minimum 25 seats)

WARRANTY
2 year limited warranty

SEATBELT EXTENDERS

Make the securing of person(s) in the back seat easier and safer with a set of these! Universal design works with most vehicles.

PT-SBE ▶

PREVENT EXPENSIVE KICK-OUTS AND MESSY CLEAN-UPS WITH THE BEST FITTING PRISONER TRANSPORT EQUIPMENT AVAILABLE.

DOOR SKINS & WINDOW BARS (TAHOE)

DOOR SKINS & WINDOW BARS (CHARGER)

KICKOUTS ARE EXPENSIVE / VERTICAL BARS CAN AFFECT VISIBILTY

Hot rolled powder coated steel window bars protect against kick-outs and the horizontal design improves driver's visibility.

AVAILABLE VEHICLE MODELS (WINDOW BARS & DOOR SKINS):
FORD INTERCEPTOR SEDAN & UTILITY
DODGE CHARGER
CHEVROLET TAHOE

TRANSPORT SEAT W/ SEAT BELT EXTENDERS/ FLOOR PAN / DOOR SKINS

TRANSPORT SEATS AND FLOOR PANS FACILITATE EASY CLEAN UPS

Preserve the value of your fleet & reduce the spread of pathogens by simply wiping down or rinsing the seat after an incident. Brooking's transport seats are made from the most durable materials and the innovative contoured design provides much needed space resulting in easier placement and extraction of the subject.

AVAILABLE VEHICLE MODELS:
FORD INTERCEPTOR (SEDAN & UTILITY)
*Utility seat fits over factory seat & Polycarbonate divider cuts off access to cargo area.
DODGE CHARGER

ACCESSORIES / INSTALLER'S TOOLBOX

◀ BR-017 (HARD SEAT ORGANIZER)

Brooking's blow molded hard seat organizer efficiently organizes equipment in a handy removeable unit. Compartments for batons, flashlights, pens, handcuffs, ticket books and just about anything else that tends to gather in the front seat or floorboard. Private labeling available with minimums required.

◀ PL-RWO (DOME LIGHT)

Lightweight and easy to mount, our dome light does exactly what it needs to do at a fraction of the cost of others. Choose from white or red without cycling through the other color for night time paperwork reducing the risk of becoming a target.

◀ BR-930 (12V OUTLET BOX)

Three 12V outlets activate via a lighted on/off switch. Mounting holes positioned on two corners for clean look. 15A in line fuse.

◀ BR-930W (12V OUTLET BOX)

Basic / standard design, hot and ground with flange mount. Constant power with a 15A in line fuse.

◀ BR-930WP (12V OUTLET BOX)

It's a BR-930W with a cigar plug for power. As you can see by now there's a choice for everyone.

◀ CB-100 (CIRCUIT BREAKER)

Heavy duty manual reset circuit breakers. Available in 50A, 80A, 100A and 150A.



◀ FB10-PLC (FUSE BLOCK)

Heavy duty fuse block with poly carbonate cover & pilot lamps that illuminate when fuse is blown. 100A max load & available in 6 & 10 gang models. (Insert prefered number of fuses after "FB")



◀ FB8-GPC (FUSE BLOCK)

Heavy duty fuse block with poly carbonate cover & grounding pad. 100A max load. Available in 8, 10 &12 gang models, insert number after "FB".

Brooking Industries, Inc. offers an extensive line of amber products, most of which are listed in this catalog. Ask your representative for a copy of our "All In Amber" catalog or visit our website @ www.brookingindustries.com and download a digital version.

B14

Voltage: 12~24 VDC
Diodes: 3W x 10
Flash Patterns: 11
Height: 5" - Dia: 5.6"

B15

Voltage: 12~24 VDC
Diodes: 3W x 12
Flash Patterns: 12
Height: 6.25" - Dia: 6.02"

B16

Voltage: 12~24 VDC
Diodes: 3W x 8
Flash Patterns: 11
Height: 3.15" - Dia: 5.59"

B17

Voltage: 12 VDC
Diodes: 1W x 4
Flash Patterns: 12
Height: 5" - Dia: 6"

JB45

Voltage: 12~110 VDC
Diodes: 1W x 6
Flash Patterns: 4
Height: 5 - Dia: 6"

JB130

Voltage: 11~110 VDC
Diodes: 1W x 3
Flash Patterns: 1
Height: 3.85" - Dia: 5.12"

JB106

Voltage: 11~110 VDC
Diodes: 1W x 3
Flash Patterns: 1
Height: 5.12" - Dia: 3.86"

MINIBARS

FALCON MINIBAR ▶

4-BOLT MOUNTS

Falcon
FMBB4

G6
G6MBB4

MB30
MBMBB4

VACUUM MAGNETS

Falcon & G6
FMG6BC2

SINGLE BOLT MOUNTS

MB30
MBMBB2

Falcon & G6
FMG6BB2

G6 MINIBAR ▶

SPECIFICATIONS

Voltage: 12 VDC
Max current: 2.4 Amps
Flash Patterns: 19

DIMENSIONS

Length: 16.7" Width: 6.9" Height: 2.9"

FEATURES

- ReFlector style optics
- 19 user selectable flash patterns
- LED colors: Amber, Blue, Red, White
- Lens color: Clear
- Dual button cig. plug (power/flash pattern)

WARRANTY

5 year limited warranty

MB30 MICROBAR ▶

SPECIFICATIONS

Voltage: 12~24 VDC
Max current: 4.2 Amps
Flash Patterns: 19

DIMENSIONS

Length: 9.76" Width: 6.77" Height: 1.45"

FEATURES

- Low power function for night time use
- 19 user selectable flash patterns
- LED colors: Amber, Blue, Red, White
- Lens color: Clear
- Dual button cig. plug (power/flash pattern)

WARRANTY

5 year limited warranty

The Falcon minibar is Brooking's answer to the typical "breadbox" minibar. The low profile design and impressive 360 degree output makes the Falcon the new standard for the public safety marketplace.

F84P ▲

40 High Intensity 1W LEDs

SPECIFICATIONS

Voltage: 12 VDC
Max current: 4.0 Amps

DIMENSIONS

Length:16.7" Width: 6.9" Height: 2.9"

FEATURES

- Xtreme linear optics (F84P)
- 26 user selectable flash patterns
- LED colors: Amber, Blue, Red, White
- Lens color: Clear
- Dual button cig. plug (power/flash pattern)

WARRANTY

5 year limited warranty

FE3P ▲

30 High Intensity 1W LEDs

SPECIFICATIONS

Voltage: 10 ~ 30 VDC
Max current: 3.2 Amps

DIMENSIONS

Length:16.7" Width: 6.9" Height: 2.9"

FEATURES

- Cup style TIR optics
- 26 user selectable flash patterns
- LED colors: Amber, Blue, Red, White
- Lens color: Clear
- Dual button cig. plug (power/flash pattern)

WARRANTY

5 year limited warranty

G6 ▼

18 High Intensity 1W LEDs

We have the answer to the "breadbox" minibar as well as the breadbox itself! This 6 head unit features ReFlector type optics behind a fluted polycarbonate dome. Don't let the lesser head count fool you, the G6 is a force to be reckoned with and the super competetive price point makes it even better!

MB30 ▼

30 High Intensity 1W LEDs

It's not mini, it's micro! Brooking's smallest, most discreet rooftop option is one of a kind and is perfect for any market. One of it's most desirable features is its compact size, if it's not needed just unplug it and put it in the glove box, carry bag or under the seat. Don't let the size fool you, output isn't compromised, as a matter of fact it's one of the brightest lights in Brooking's vast and ever growing line of top notch lighting products.